




Commercial and Institutional model selection guide

Series											
1000 - Low flow - up to 4 gpm (15 Lpm)											
2000 - Medium flow - up to 5 gpm (19 Lpm)											
3000 - High flow - up to 6 gpm (23 Lpm)											
4000 - Extreme flow - up to 7 gpm (26 Lpm)											
Drain Diameter (K)											
Standard Dimensions: 2, 3 or 4 inches (50, 75 or 100 mm)											
Unit Length (L)											
Available from 30 to 100 inches (760 mm to 2540 mm)											
Option - Potable water connector diameter (M)											
A = 1/2 inch (12mm)											
B = 3/4 inch (19mm)											
C = 1 inch (25mm)											
D = 1-1/4 inch (32mm)											
E = 1-1/2 inch (38mm)											
Options - see below											
Leave this blank if no option selected											
2 3 60 - B - _					← Model number example						
					Efficiency	Power	Pressure Drop	Mass			
					%	kW	kPa (PSI)	kG (lbs)			
					K	L	M	X			
1000 Series	1	3	30	-	A	-	x	41	8.1	31 (4,5)	7,2 (16)
	1	3	40	-	A	-	x	51	10.1	45 (6,5)	9,9 (22)
	1	3	60	-	A	-	x	60	11.9	67 (9,7)	15,1 (33)
	1	4	30	-	A	-	x	48	9.5	34 (5,0)	10,1 (22)
	1	4	40	-	A	-	x	56	11.1	48 (7,0)	13,8 (30)
	1	4	60	-	A	-	x	67	13.3	76 (11,1)	21 (46)
2000 Series	2	3	30	-	A	-	x	39	7.7	14 (2,0)	8,1 (18)
	2	3	40	-	A	-	x	47	9.3	17 (2,5)	11,0 (24)
	2	3	60	-	A	-	x	57	11.3	23 (3,4)	16,6 (37)
	2	3	80	-	A	-	x	60	11.9	34 (5,0)	20,1 (44)
	2	4	30	-	A	-	x	45	8.9	19 (2,8)	11,0 (24)
	2	4	40	-	A	-	x	52	10.3	22 (3,2)	14,9 (33)
	2	4	60	-	A	-	x	63	12.5	33 (4,8)	23,1 (51)
	2	4	80	-	A	-	x	67	13.3	36 (5,2)	28,6 (63)
3000 Series	3	3	60	-	A	-	x	53	10.5	14 (2,0)	17,1 (38)
	3	3	80	-	A	-	x	56	11.1	14 (2,1)	21,3 (47)
	3	3	100	-	A	-	x	58	11.5	21 (3,0)	25,9 (56)
	3	4	60	-	A	-	x	54	10.7	14 (2,1)	24,3 (53)
	3	4	80	-	A	-	x	64	12.7	16 (2,3)	29,1 (64)
	3	4	100	-	A	-	x	69	13.6	22 (3,2)	35,2 (77)
4000 Series	4	3	80	-	A	-	x	55	10.9	<14 (2)	22,4 (49)
	4	3	100	-	A	-	x	57	11.3	<14 (2)	26,8 (59)
	4	4	80	-	A	-	x	62	12.3	<14 (2)	30,2 (66)
	4	4	100	-	A	-	x	67	13.3	<14 (2)	36,9 (81)

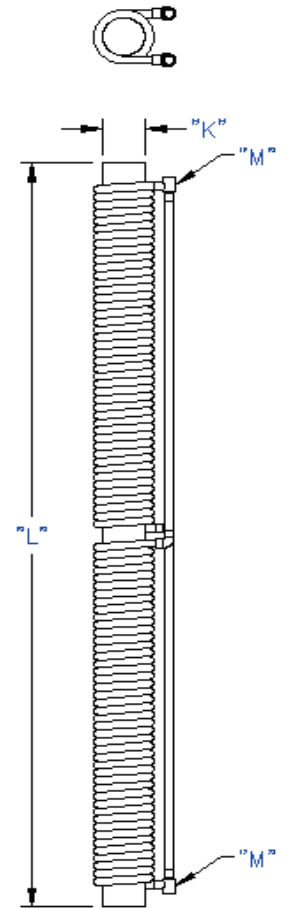

ECO-GFX
Drain water heat exchanger

Notes : 1- Data obtained at equal flow 9,5 Lpm (2,5 Gpm) with a ΔT of 30 °C;
2- Custom dimensions are available on request

Available Options (x)

- E : Internal epoxy coating
- C : Drain connectors and potable water connectors included
- V : External clear coat finish