



# Data sheet model 1340-A

## Eco-GFX<sup>™</sup> Drain water heat exchanger

### Characteristics\* :




Standardized efficiency : 50.9%  
 Pressure drop : 6.5 psi (44.8 kPa)  
 Power capacity : 10.0 kW  
 Length : 40" (1016mm)  
 Nominal drain diameter: 3" (75mm)  
 Potable connection: 1/2" (12mm)  
 Nb of coils : 1  
 Max. pressure : 150 psi (1034 kPa)

### Applications :

Residential single housing  
 Low flow rates  
 Single installation  
 Entry level model

### Materials :

Central drain tube : ASTM 306  
 1/2" Type L outer coil: ASTM B-88

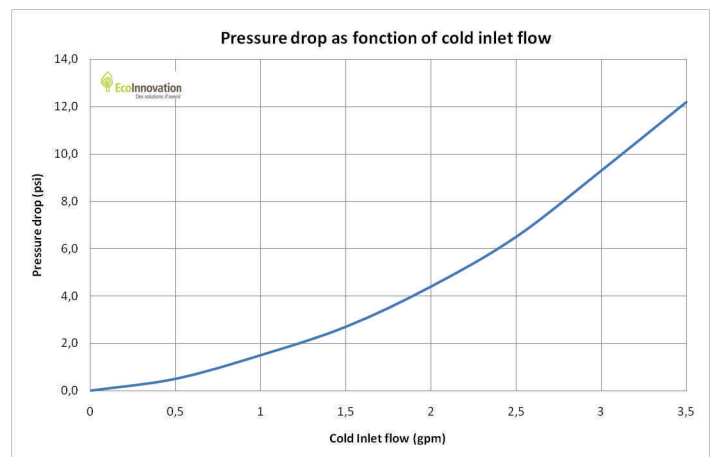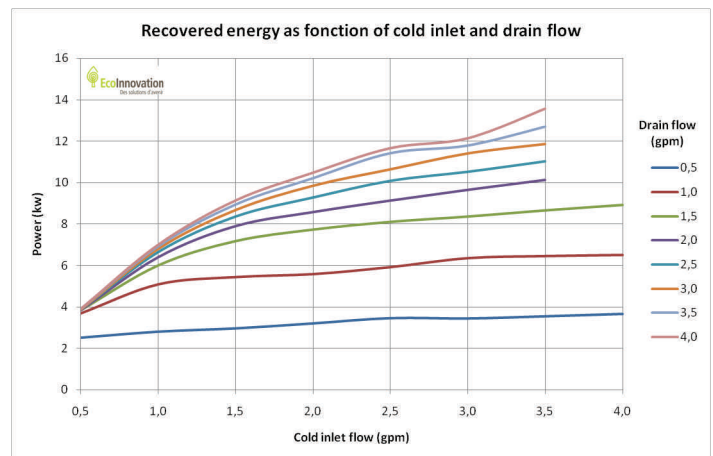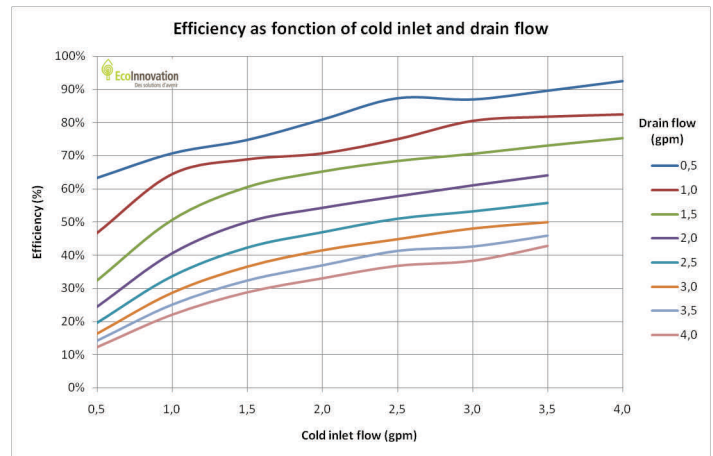

<b>Series</b>			
1000 - Low flow - up to 4 gpm (15 Lpm)			
2000 - Medium flow - up to 5 gpm (19 Lpm)			
3000 - High flow - up to 6 gpm (23 Lpm)			
4000 - Extreme flow - up to 7 gpm (26 Lpm)			
<b>Drain Diameter (K)</b>			
Standard Dimensions: 2, 3 or 4 inches (50, 75 or 100 mm)			
<b>Unit Length (L)</b>			
Available from 30 to 100 inches (760 mm to 2540 mm)			
<b>Option - Potable water connector diameter (M)</b>			
A = 1/2 inch (12mm)			
B = 3/4 inch (19mm)			
C = 1 inch (25mm)			
D = 1-1/4 inch (32mm)			
E = 1-1/2 inch (38mm)			
<b>Options - see below</b>			
Leave this blank if no option selected			
1	3	40	A

← Model number example

\* Equal flow, 2.5 gpm (9.5 lpm), 30°C dT

MODEL/MODÈLE :	1								
----------------	---	--	--	--	--	--	--	--	--

DRAIN DIA. "K"	LENGHT/LONG. "L"	RACCORD/CONNECT. "M" OPTION
2" (50mm)	30" (762mm)	A=1/2" (12mm)
3" (75mm)	36" (914mm)	B=3/4" (19mm)
4" (100mm)	40" (1016mm)	C=1" (25mm)
	42" (1067mm)	D=1-1/4" (32mm)
	48" (1219mm)	E=1-1/2" (38mm)
	54" (1372mm)	F=2" (50mm)
	60" (1524mm)	

SERIES/SÉRIE	E: INNER DRAIN EPOXY COATED CHEMISAGE DRAIN INTERNE EPOXY FLEXIBLE CONNECTORS INCLUDED CONNECTEURS FLEXIBLES INCLUS EXTERNAL CLEAR VARNISH FINISH VERNISSEGE EXTERNE CLAIR
--------------	---

