



Data sheet model TD340



Characteristics* :

Standardized efficiency : 50.9%
 Pressure drop : 6.5 psi (44.8 kPa)
 Power capacity: 10.0 kW
 Length : 40" (1016mm)
 Nominal drain diameter: 3" (75mm)
 Potable connection: 1/2" (12mm)
 Nb of coils : 1
 Max. pressure : 150 psi (1034 kPa)

Applications :




Residential single housing
 One shower installation
 Single installation
 Home builder

Materials :

Central drain tube : ASTM 306
 1/2" Type L outer coil: ASTM B-88

Features :

Best efficiency in its class**
 Compact unit, ease of installation
 Excellent value

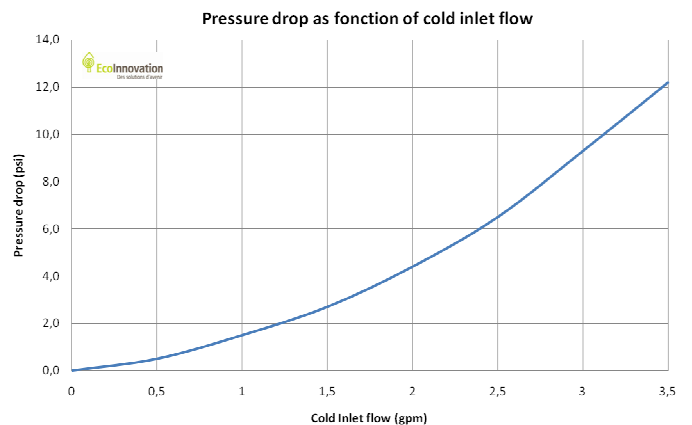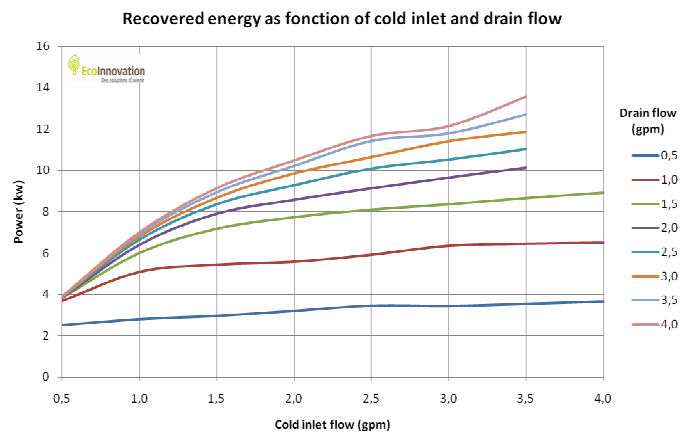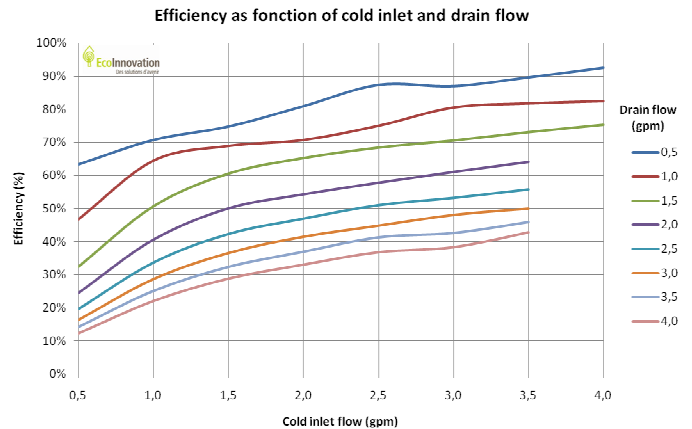

* Equal flow, 2.5 gpm (9.5 lpm), 30°C dT, ** SRC 2007 test report